

LED Strobe Lights – Model 407


0646491

Product Information

| | |
|--------------------------------------|---|
| Description | Model 407 - 12/80V LED Strobe Light - Amber |
| Height | 96.52 mm / 3.8 in |
| Width | 121.92 mm / 4.8 in |
| Depth | 121.92 mm / 4.8 in |
| Shape | Round |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Amber |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x4) #8-16 x 3/4 Mounting Screw |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 60 °C |
| Connector or Wiring | 12" Leads |
| Shipping Weight | 1.93 lbs / 0.88 kgs |



Product Dimensions

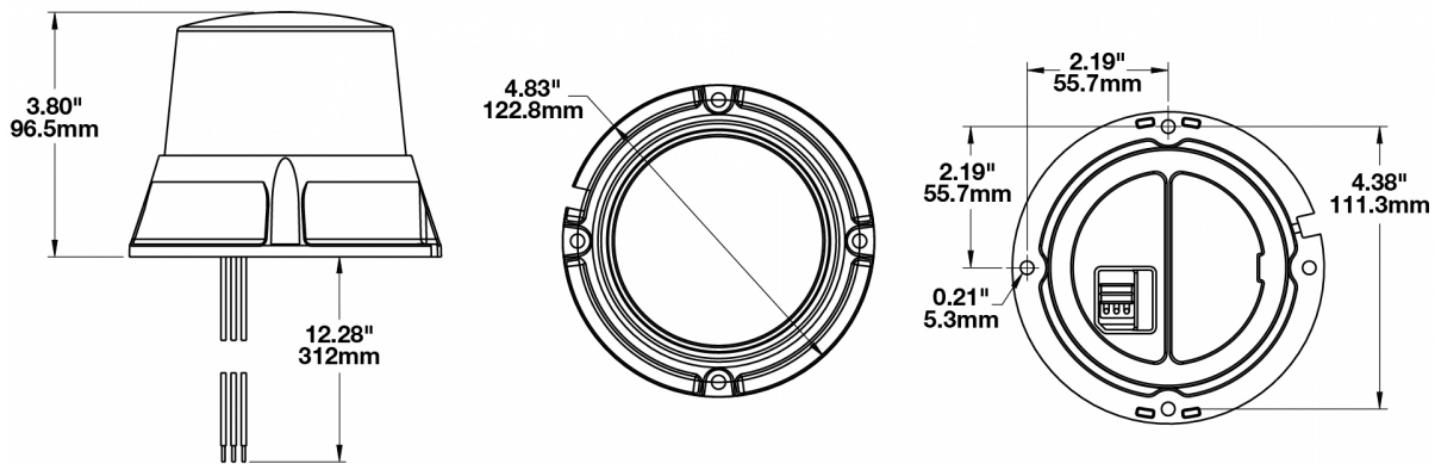

Electrical Specifications

| | |
|--------------------------|---|
| Input Voltage | 12-80V DC |
| Operating Voltage | 9-110V DC |
| Red Wire | Positive |
| Black Wire | Negative |
| Yellow Wire | Mode |
| Current Draw | 0.915A @ 12V DC 0.500A @ 24V DC 0.340A @ 36V DC 0.265A @ 48V DC 0.190A @ 72V DC |

Photometric Specifications

| | |
|------------------------|--|
| Candela Output | 560 |
| Beam Pattern(s) | Warning - Rotating Warning Warning - Strobe |
| Flash Rate 1 | Beacon |
| Flash Rate 2 | Quadruple 480 |
| Flash Rate 3 | Fast 540 |
| Flash Rate 4 | Double 240 |
| Flash Rate 5 | Burst 300 |
| Flash Rate 6 | Steady Flash 60 |

Additional Specifications

| | |
|----------------------|---|
| IP Rating | IP69K |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | SAEJ845, ECE Reg 10 & 65 |
| Pack Quantity | 1 |